


FASTRACK

Indicative Specs Only

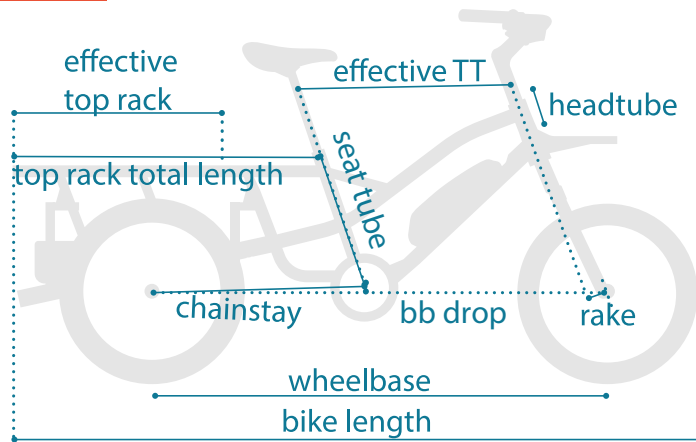

Fast Rack	ONE SIZE
Effective Top Tube	578mm
Seat Tube	380mm
Head Angle	68°
Seat Tube Angle	71°
Chainstay	560mm
Bottom Bracket Drop	N/A
Head Tube	175mm
Fork Rake	42mm
Wheelbase	1235mm
Bike Length	1912mm
Top Rack Total Length	830mm
Effective Top Rack	600mm
Color Options	Blue, Stealth, Green
Minimum Rider Height	4'11 - 1.5m
Maximum Rider Height	6'2- 1.86m

Alternative Part Spec¹, Requires Deck², Requires Cable³, With Optional Seatpost¹

FRAME KIT	
Frame	FastRack V1 20" 6061-T6 w/Disc Tab
Fork	SR Suntour SF20 Mobie or RST Porter 20-15 ¹
Sideloader	D.R.S. included
COCKPIT	
Headset	Cane Creek Viscoset or FSA CBS ¹
Stem	Yuba 1-1/8" Adjustable Stem
Handlebars	Yuba 31.8mm City Handlebars
Grips	Yuba Ergo Grip
Saddle	Yuba Comfort Saddle
Seatpost	31.6 Telescoping
BRAKE KIT	
Levers	Magura MT32 Hydraulic or RideRever Attack-XU Hydraulic ¹
Brake	Magura MT32 Hydraulic or RideRever Attack-XU Hydraulic ¹
Rotor	Magura Storm CL 180 (Front Rear)
TRANSMISSION	
Motor System	Shimano Steps E7000 250W w/36V 500Wh Battery, SC-E7000 Display
Front Derailleur	N/A
Rear Derailleur	Shimano Deore RD-M6000
Shift Lever	Shimano Deore SL-T6000 10 Speed Trigger Shifter
Cassette	Shimano 11-36T 10-Speed
Chain	KMC X10e 10-Speed
Crankset	Lasco 170mm
Pedals	Alloy Flat
WHEELS	
Rims	Alloy Double Wall (36H Front 36 H Rear)
Hubs	Thru Axle Quick Release Sealed Ball Bearing
Tires	Schwalbe Super Moto (20" x 2.4")
WEIGHT SPECS	
Bike Weight	76 lbs (34.5 kg)
Max G.V.W.R.	440 lbs (200kg)
ADDITIONAL ITEMS	
Included	AXA Lights, Bell, Compact Double Stand, Fenders
Add Ons	Adjustable Monkey Bars ² , Bread Basket, Mini Soft Spot, Pin Lock ³ , Pop Top, Soft Spot, Utility Deck, Yepp Nexxt, Grab & Go, D.R.S. Sling

Specifications are subject to change without notice